HUM SERIES · INDUSTRIAL ULTRASONIC HUMIDIFIERS

DanVex HUM-3S

Industrial ultrasonic humidifier · 3 L/h



Industrial ultrasonic humidifiers for permanent installation where stable humidity is part of the process — printing and paper, manufacturing sites, storage of moisture-sensitive goods, museums, laboratories and indoor cultivation.

Ultrasonic transducers produce a fine cold mist at low energy cost; a digital panel with external hygrostat and Modbus RTU RS-485 holds humidity to setpoint and integrates with building management.

Printing & paper · Manufacturing · Greenhouses · Museums & archives · Laboratories · Storage & warehouses

KEY FEATURES

- **Ultrasonic atomisation** — high-frequency transducers produce fine cold mist; low energy vs steam humidifiers
- **Digital control + external hygrostat** — Auto / Manual modes, remote humidity sensor, Modbus RTU RS-485 for BMS
- **Instant start-up** — no preheating required — full output from the moment it switches on
- **Stainless steel housing** — corrosion-resistant cabinet for long service life
- **Direct water supply** — G ½″ inlet/drain with float sensor, auto-drain and emergency overflow valves
- **Safe fog temperature** — controlled by the water inlet temperature, preventing burns and protecting nearby equipment

SPECIFICATIONS

Maximum capacity	**3 L/h**
Maximum daily output	**72 L/day**
Working RH range	**0–100% RH**
Supply airflow	**180 m³/h**
External static pressure	**20 Pa**
Mist vent	**1×110 mm**
Operating temperature	**+5 … +45 °C**
Power	**300 W**
Voltage	**230 V 1-ph / 50–60 Hz**

Control	**Digital, Auto/Manual, ext. hygrostat**
Connectivity	**Modbus RTU RS-485**
Water inlet / drain	**G ½″ / G ½″**
Ingress protection	**IPX0 (dry indoor)**
Dimensions (L×W×H)	**600×300×495 mm**
Package size (L×W×H)	**680 × 440 × 630 mm**
Net weight	**26 kg**
Gross weight	**27 kg**

© 2026 **DanVex** · Industrial & Professional Climate Control

DIMENSIONS & VIEWS

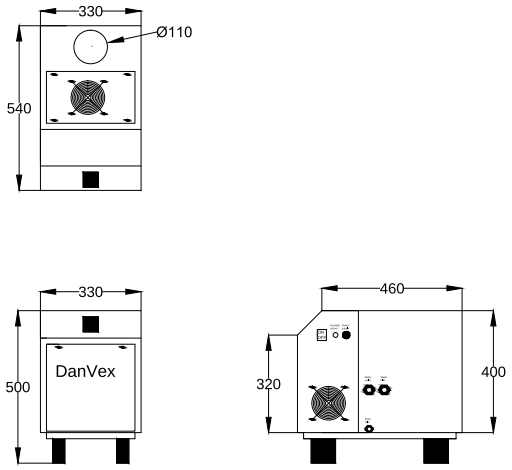

Dimensions in mm. Views: plan view with mist outlets (Ø 110), front view, side view with control panel, water inlet / outlet and drain.

UNIT L×W×H	PACKAGE L×W×H	NET / GROSS WEIGHT	MIST OUTLETS
600×300×495 mm	**680 × 440 × 630 mm**	**26 kg / 27 kg**	**1×110 mm**

SCOPE OF SUPPLY

- Ultrasonic humidifier, stainless steel housing
- External humidity sensor (hygrostat)
- Pre-filtration water filter
- Digital control panel with Modbus RTU RS-485

INSTALLATION & CONNECTIONS

Mounting	Floor-standing (castors), wall-mounted or remote-mounted; mist outlets Ø 110 mm can be connected to distribution hoses or ducts. Position so that the mist does not settle on equipment or surfaces before it evaporates.
Water connection	Direct water supply G ½″ with float sensor and pre-filtration water filter; drain G ½″ with self-draining valves and safety overflow. High-purity water — reverse-osmosis or distilled — is recommended to avoid mineral deposits.
Electrical supply	230 V, 1-phase, 50–60 Hz, plug-in connection to a socket protected per local code.
Control & BMS	Digital control panel, Auto / Manual modes, external humidity sensor (hygrostat) included; Modbus RTU RS-485 for BMS/SCADA.

HUM SERIES — MODEL RANGE

Parameter	HUM-3S	HUM-6S	HUM-9S	HUM-12S	HUM-15S	HUM-18S
Maximum capacity	**3 L/h**	6 L/h	9 L/h	12 L/h	15 L/h	18 L/h
Maximum daily output	**72 L/day**	144 L/day	216 L/day	288 L/day	360 L/day	432 L/day
Supply airflow	**180 m³/h**	180 m³/h	280 m³/h	280 m³/h	300 m³/h	400 m³/h
External static pressure	**20 Pa**	20 Pa	40 Pa	40 Pa	50 Pa	50 Pa
Mist vent	**1×110 mm**	1×110 mm	2×110 mm	2×110 mm	3×110 mm	3×110 mm
Power	**300 W**	600 W	900 W	1200 W	1500 W	1800 W
Dimensions (L×W×H)	**600×300×495 mm**	600×300×495 mm	640×420×500 mm	640×420×500 mm	640×640×500 mm	640×640×500 mm
Net weight	**26 kg**	27 kg	36 kg	39 kg	50.5 kg	54 kg

Specifications, dimensions and drawings are subject to change without notice and may differ from the delivered unit; verify critical dimensions against the installation manual before design work. Humidification capacity is the maximum output at nominal water and air conditions.